

GUSSETED BAG

SEAL AREAS

- A** Minor discoloration may occur due to the higher level of heat and pressure that are required to achieve a complete seal.

APPLICATION TOLERANCES

- B** TIN TIE
 $\pm 1/8"$ (~3mm)
in any direction.
- C** VALVE
 $\pm 1/8"$ (~3mm)
in any direction.
Note: 2" gap between tin-tie and valve is required.

ALIGNMENT TOLERANCE

- D** ARTWORK
 $\pm 1/16"$ (~2mm)
Ensure all artwork is centered.
May show bleed from previous print.


OTHER TOLERANCES

- E** SEAL SIZE
 $\pm 1/16"$ (~2mm)
- F** CUT
 $\pm 1/16"$ (~2mm)
May show bleed from previous print.

QUANTITY Per SKU

$\pm 10\%$

We may produce and ship slightly above or below your desired quantity, therefore you may have a remaining balance if we produce and ship more, or be reimbursed if we produce and ship less.

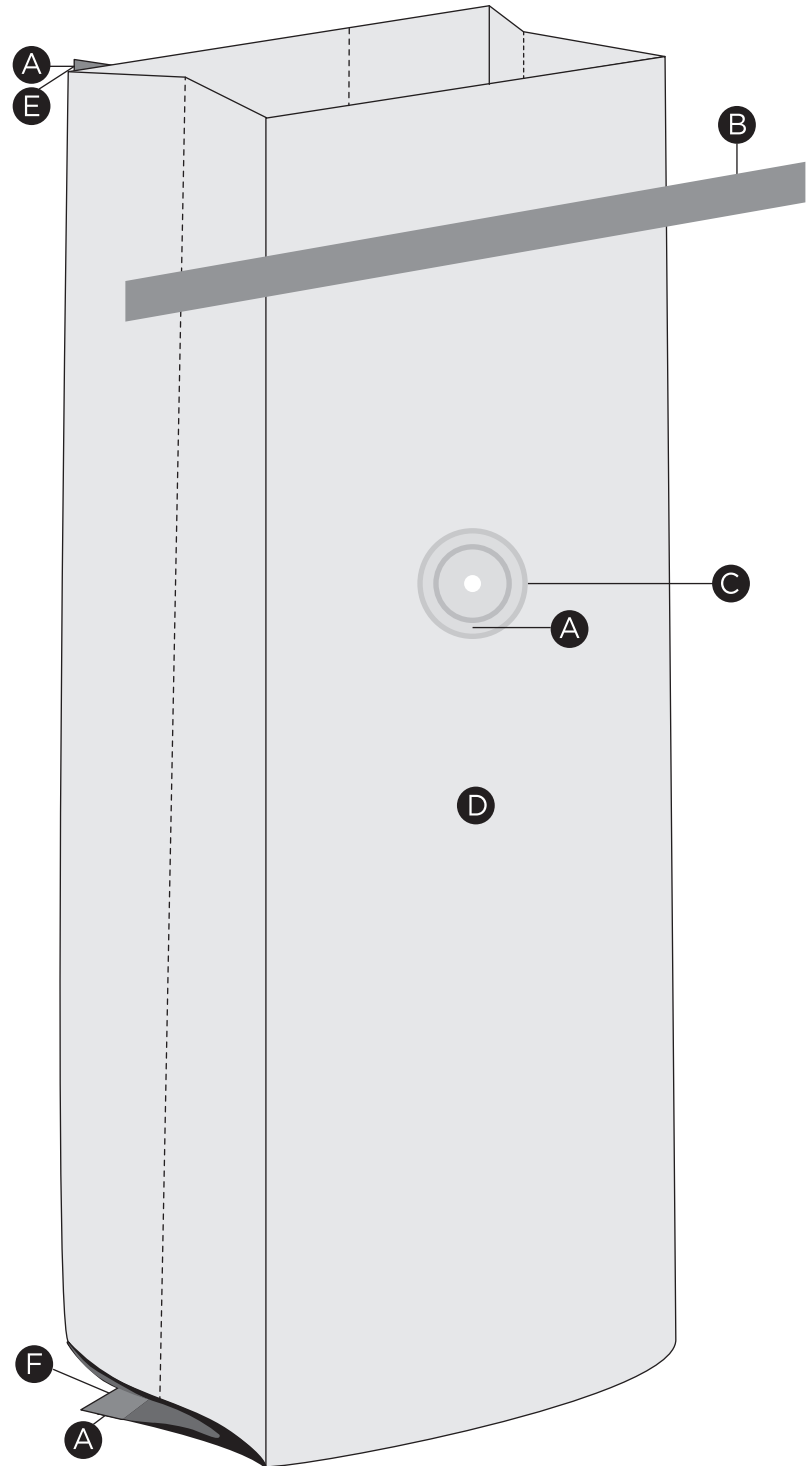

Signature: _____

Date: _____

*Please return the signed form to your sales representative.

rev0621